


RODLESS PNEUMATIC CYLINDERS SERIES S1



STRÁNSKÝ A PETRŽÍK



The rodless cylinders of the S1 series are particularly useful where there is no space for a standard cylinder. The piston rod does not extend from the cylinder. Thanks to their maximum stroke of up to 6 meters, they can also be used in applications where the use of a conventional cylinder would be impossible. This series uses the proven two-strip principle.

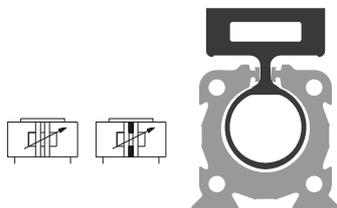

| | |
|------------------|--|
| Working pressure | 0,6 MPa |
| Min. pressure | 0,3 MPa |
| Max. pressure | 1,0 MPa |
| Temp. range | -20°C to +80°C |
| Working medium | modified compressed air |
| Carriage speed | min. 20 mm.s ⁻¹ max. 3 m.s ⁻¹ |


| Piston diameter [mm] | 16 | 25 | 32 | 40 | 50 |
|--------------------------------------|------|-------|-------|-------|-------|
| Force at 0,6 MPa [N] | 125 | 250 | 420 | 640 | 1050 |
| Connection | M5 | G1/8" | G1/4" | G3/8" | G3/8" |
| Length of adjustable cushioning [mm] | 16,5 | 25 | 32,5 | 41,5 | 52 |
| Max. stroke [mm] | 5000 | 6000 | 6000 | 6000 | 6000 |
| Stroke tolerance [mm] | +2,5 | +2,5 | +3,2 | +3,2 | +3,2 |

| Piston diameter [mm] | | 16 | 25 | 32 | 40 | 50 |
|-----------------------|----------------------------|-------|-------|-------|-------|-------|
| Weight | Carriage | | | | | |
| | base - 0 mm of stroke [kg] | 0,31 | 0,75 | 1,31 | 2,6 | 4,79 |
| | medium | - | 0,84 | 1,48 | 2,91 | 5,55 |
| | long | - | 1,05 | 1,93 | 3,8 | 7,33 |
| 100 mm of stroke [kg] | | 0,104 | 0,210 | 0,325 | 0,555 | 0,955 |

Order codes


Piston diameter 16 mm

A S1 0 0 4 16 0500 M

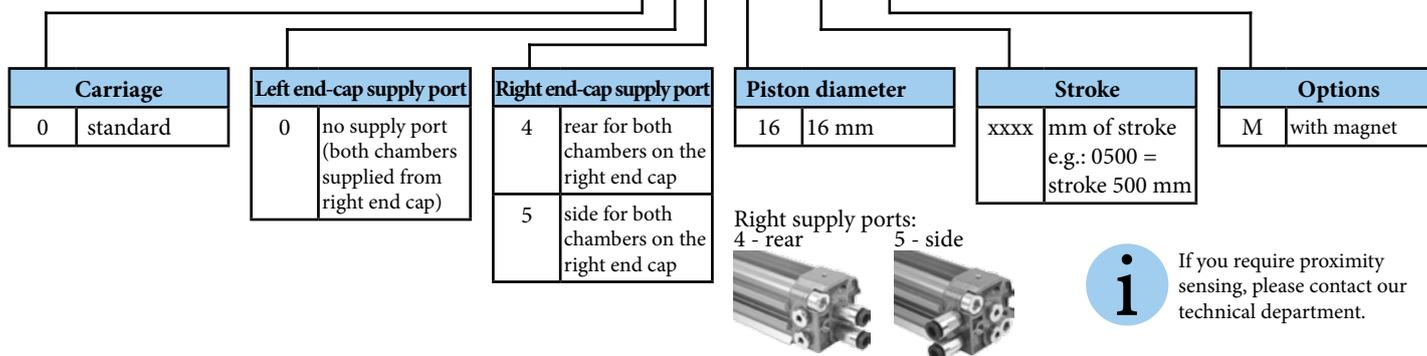


Piston diameter 25 to 50 mm

A S1 0 1 1 25 0500 M

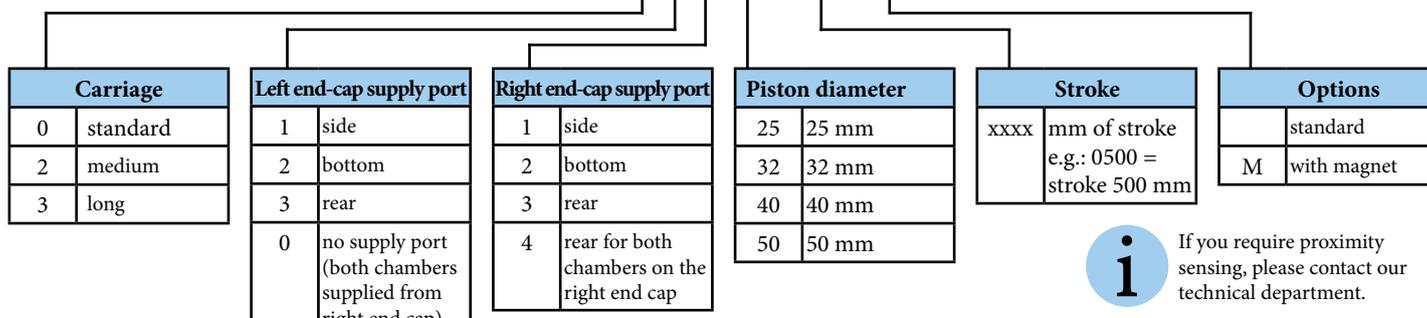

Construction / materials


- caps: ø16: zamak ø25-50: die-cast aluminium
- tube: anodized aluminium
- piston: aluminium
- piston guide slide: acetalic resin
- sealings: NBR
- magnet: neodymium



- i** For long-term and trouble-free operation, we recommend:
- 1) speed maximum 1 m.s⁻¹
 - 2) use a hydraulic shock absorber if the efficiency of the internal cushioning approaches the limit value
 - 3) if the cylinder is used vertically, the cushioning capacity is reduced by 40%
 - 4) maintain a correct and constant lubrication

- i** The pneumatic sealing is achieved through an axial elastomer stripseal reinforced with Kevlar. This system guarantees dimensional stability even with high speeds. The external protection seal consists of a thermoplastic stripseal reinforced with Kevlar.
-

Permissible static load and stress


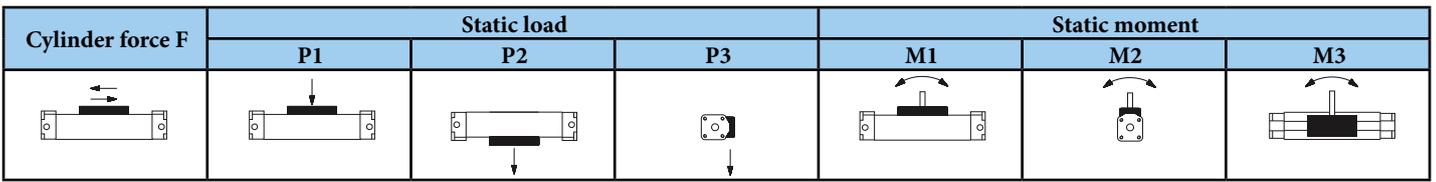


| Ø | F [N] at 0,6 MPa | Static load | | | Static moment | | | | | | | | |
|----|------------------|-------------|-----|-----|---------------|-----|-----|----|----|----|----|----|----|
| | | P1 | P2 | P3 | M1 | | | M2 | | | M3 | | |
| | | [N] | [N] | [N] | M1 | M2 | M3 | M1 | M2 | M3 | M1 | M2 | M3 |
| 16 | 125 | 100 | 100 | 25 | 5 | 0,2 | 0,8 | - | - | - | - | - | - |
| 25 | 250 | 200 | 200 | 50 | 8 | 2 | 3 | 14 | 3 | 5 | 15 | 6 | 9 |
| 32 | 420 | 250 | 250 | 65 | 9 | 3 | 4 | 15 | 4 | 7 | 28 | 8 | 12 |
| 40 | 640 | 350 | 350 | 90 | 11 | 9 | 14 | 16 | 14 | 20 | 31 | 27 | 39 |
| 50 | 1050 | 500 | 500 | 125 | 19 | 13 | 19 | 29 | 20 | 30 | 52 | 36 | 53 |

i A moment is the product of the load (N) and the arm (m), i.e. the distance between the centre of gravity of the load and the longitudinal axis of the piston. Please note that in dynamic conditions, the load must be reduced due to effects associated with the speed. Calculation of permissible dynamic stress and verification of internal damping efficiency can be found on page 1-47.


Dimensions

Standard carriage - 6 fixing holes
Ø 16 mm

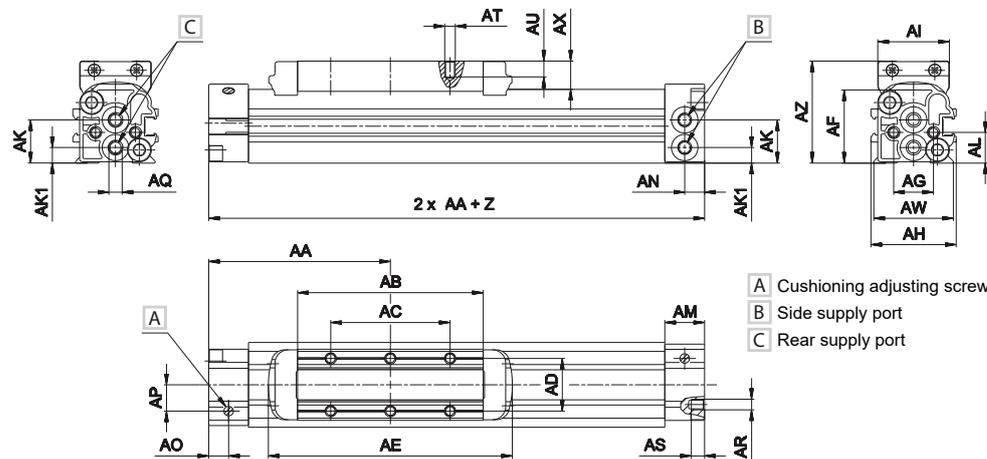

- A Cushioning adjusting screw
- B Side supply port
- C Rear supply port

Ø 25 - 50 mm

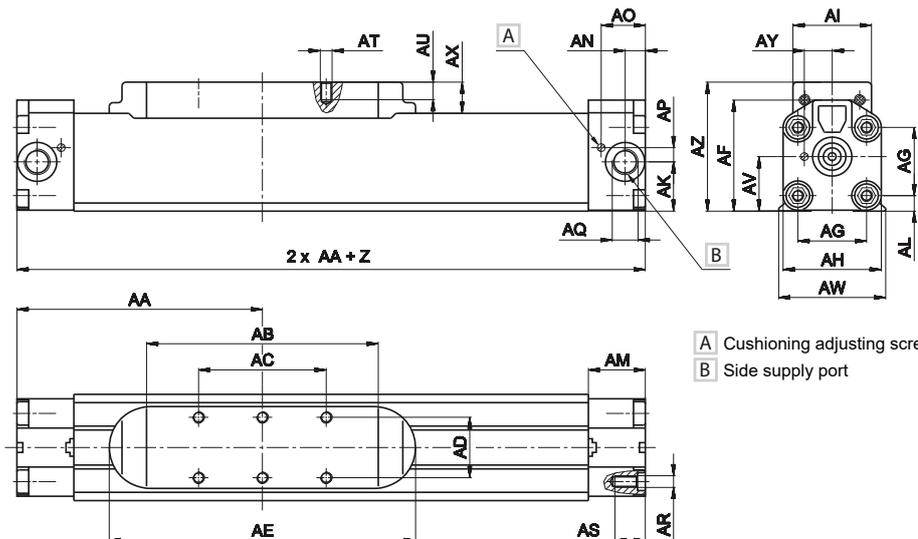


- A Cushioning adjusting screw
- B Side supply port

Z = stroke

| Ø | AA | AB | AC | AD | AE | AF | AG | AH | AI | AK | AK1 | AL | AM | AN | AO | AP | AQ | AR | AS | AT | AU | AV | AW | AX | AY | AZ |
|----|------|-----|-----|----|-----|------|----|------|----|------|-----|------|----|------|------|------|-------|-----|------|----|----|------|------|------|------|------|
| 16 | 68,5 | 70 | 45 | 20 | 92 | 30 | 18 | 32 | 27 | 16,5 | 6 | 11,5 | 15 | 7,5 | 7,5 | 10 | M5 | M4 | 5 | M4 | 6 | - | 30 | 11 | - | 39 |
| 25 | 100 | 95 | 50 | 24 | 130 | 48,3 | 28 | 40,5 | 33 | 20,2 | - | 7 | 24 | 7,4 | 18,2 | 5,7 | G1/8" | M5 | 12 | M5 | 9 | 22,8 | 42,8 | 16 | 12,2 | 57,6 |
| 32 | 125 | 118 | 65 | 31 | 156 | 57 | 35 | 50 | 40 | 25,3 | - | 8 | 29 | 10,3 | 22,5 | 7,3 | G1/4" | M6 | 15,5 | M6 | 9 | 28 | 54,5 | 16 | 14,2 | 66,2 |
| 40 | 150 | 134 | 65 | 31 | 177 | 74 | 44 | 64 | 44 | 33,8 | - | 11,8 | 33 | 12,5 | 26,5 | 8,7 | G3/8" | M8 | 20 | M6 | 11 | 37 | 67 | 19,5 | 16,5 | 85,8 |
| 50 | 175 | 164 | 105 | 39 | 211 | 90,7 | 55 | 80 | 54 | 41,4 | - | 14,7 | 33 | 14,2 | 25,7 | 11,8 | G3/8" | M10 | 20 | M8 | 12 | 47,7 | 86 | 20,5 | 19,1 | 103 |


RODLESS PNEUMATIC CYLINDERS SERIES S1

Medium carriage - 6 fixing holes

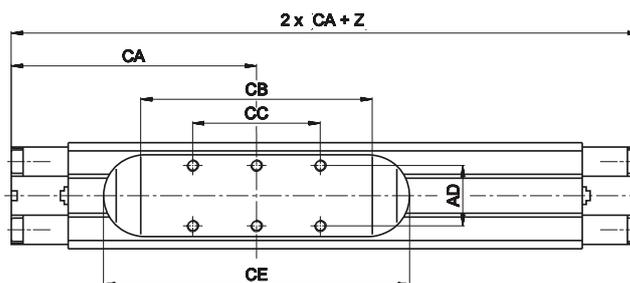

1


Long carriage - 10 fixing holes

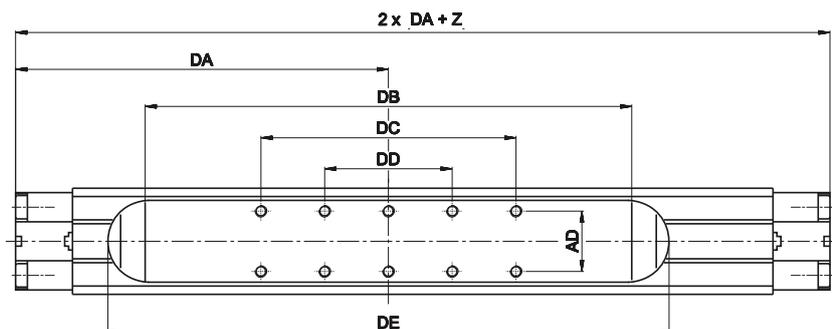

Z = stroke

| ∅ | AD | CA | CB | CC | CE | DA | DB | DC | DD | DE |
|----|----|-------|-----|-----|-----|-------|-----|-----|-----|-----|
| 25 | 24 | 114,5 | 125 | 50 | 160 | 147,5 | 190 | 100 | 50 | 225 |
| 32 | 31 | 142,5 | 153 | 65 | 191 | 190 | 248 | 130 | 65 | 286 |
| 40 | 31 | 169 | 172 | 65 | 215 | 225 | 284 | 130 | 65 | 327 |
| 50 | 39 | 205 | 224 | 105 | 271 | 277 | 364 | 315 | 105 | 411 |

Mounting accessories

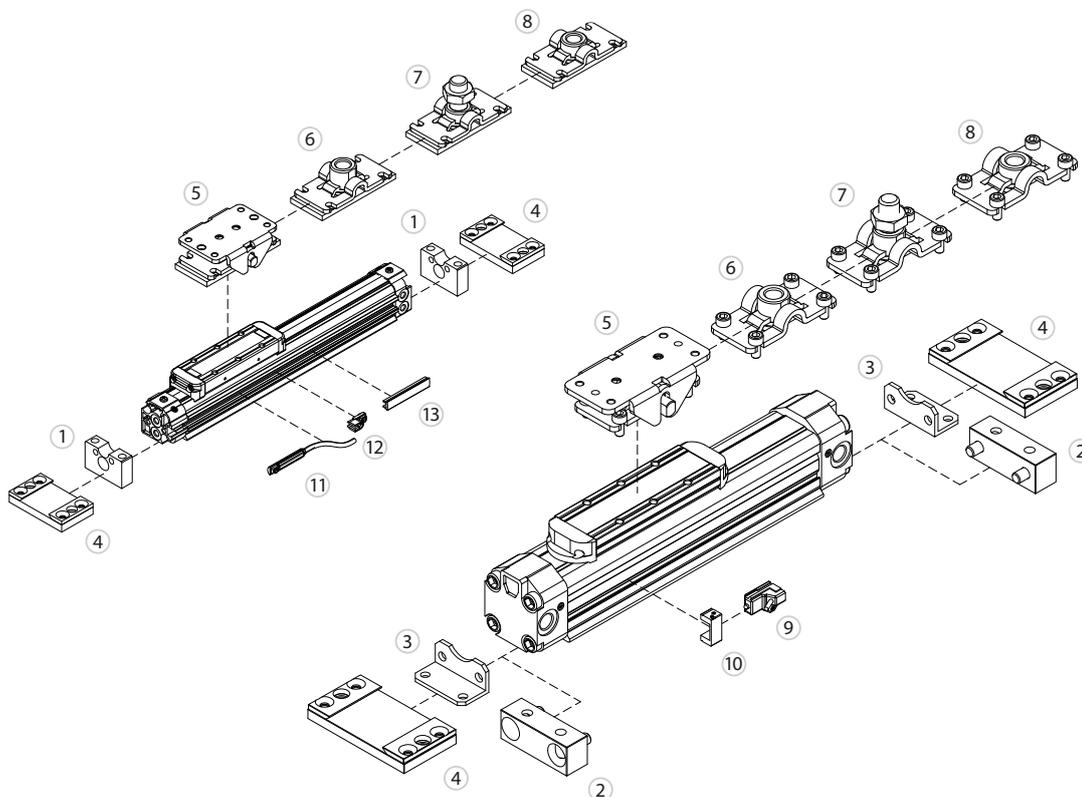

| Mounting accessories | ... see page |
|---------------------------------|--------------|
| 1 Bracket for ∅16 | ... 4-32 |
| 2 Bracket for ∅40, 50 | ... 4-32 |
| 3 Bracket for ∅25, 32 | ... 4-32 |
| 4 Fixing plate | ... 4-30 |
| 5 Oscillating bracket | ... 4-30 |
| 6 Female threaded connection... | 4-31 |
| 7 Male threaded pin | ... 4-31 |
| 8 Female connection w/o thread | ... 4-31 |
| 9 DH sensor for ∅25-50 | |
| 10 DH sensor fixing plate | |
| 11 DF sensor for ∅16 | |
| 12 Cable clamping for DF sensor | |
| 13 DF sensor covering strip | |

Examination and verification of internal cushioning

In a system with moving masses, as in the case of rodless cylinders, it is essential to control the dissipation of the system's kinetic energy as it is brought to a stop. First of all, it is necessary to establish and verify the most suitable method for cushioning the system, in order to avoid the moving mass (carriage with load) striking against the end-caps and compromising the life of the cylinder.


If the point corresponding to a given load and speed lies beneath the appropriate curve, the cushioning is able to absorb the kinetic energy of the system.

Vice versa if the point lies above the curve, the cushioning is not able to absorb the kinetic energy. In that case you must:

- a) decrease the load and maintain the translation speed
- b) decrease the speed and maintain the load
- c) select a cylinder with a bigger bore or with twin chambers
- d) use external hydraulic shock absorber (see page 9-1)

Attention: if the cylinder is mounted vertically, the damping efficiency is reduced by 40%.

Internal cushioning efficiency

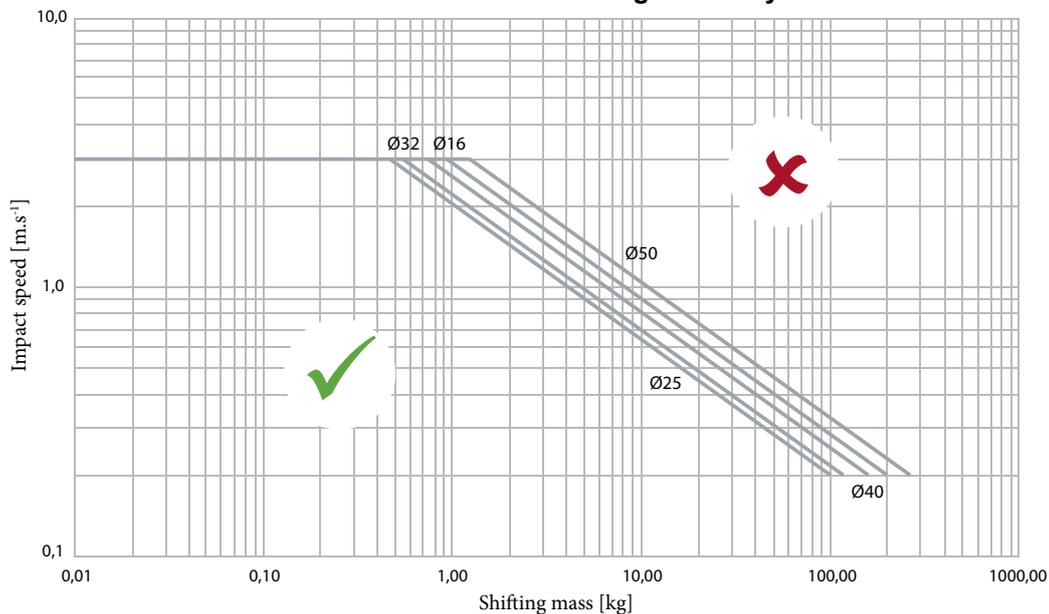

Dynamic load capacity

Procedure for determining the permissible values for dynamic stress:

- determine the KRV coefficient according to the speed
- multiply the permissible values for static stress by the KRV coefficient and the value calculated in this way is the maximum permissible value for dynamic stress

