



## BRACKET FOR RODLESS CYLINDER


### • SERIES S1

Supply contains:

- 1 pc bracket
- 2 pcs screw



Z = cylinder stroke

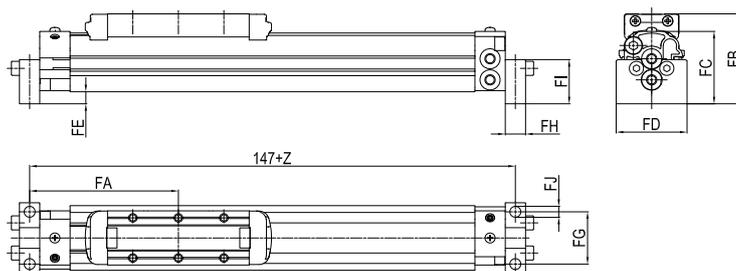

| Piston Ø | Max. stroke | FA   | FB | FC | FD | FE | FG | FH | FI | FJ  | Weight | Order codes |
|----------|-------------|------|----|----|----|----|----|----|----|-----|--------|-------------|
| 16       | 250         | 73,5 | 45 | 36 | 35 | 6  | 26 | 10 | 22 | 5,5 | 0,015  | ASF-13016   |

Note: the bracket should not be used if the cylinder stroke is greater than the specified value

## BRACKET FOR RODLESS CYLINDER


### • SERIES S1, S5 AND VL1

Supply contains:

- 1 pc bracket
- 2 pcs screw



Z = cylinder stroke

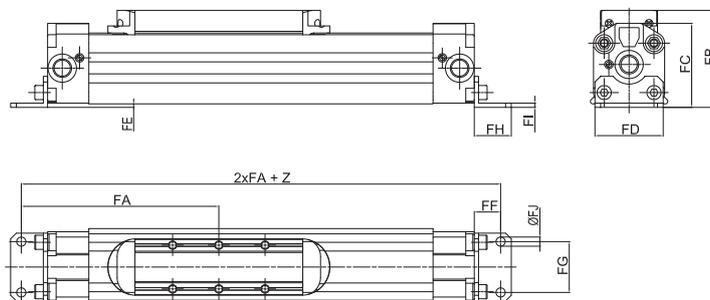

| Piston Ø | Max. stroke | FA    | FB for series |    |      | FC   | FD | FE  | FF   | FG | FH | FI  | FJ  | Weight | Order codes |
|----------|-------------|-------|---------------|----|------|------|----|-----|------|----|----|-----|-----|--------|-------------|
|          |             |       | S1            | S5 | VL1  |      |    |     |      |    |    |     |     |        |             |
| 25       | 300         | 116   | 58,1          | -  | 74,8 | 48,8 | 40 | 0,5 | 16   | 27 | 22 | 2,5 | 5,5 | 0,034  | ASF-13025   |
| 32       | 350         | 143,5 | 68,7          | 85 | -    | 59,2 | 48 | 2,5 | 18,5 | 36 | 26 | 3   | 6,5 | 0,053  | ASF-13032   |

Note: the bracket should not be used if the cylinder stroke is greater than the specified value

## BRACKET FOR RODLESS CYLINDER


### • SERIES S1, S5 AND VL1

Supply contains:

- 1 pc bracket
- 2 pcs screw



Z = cylinder stroke

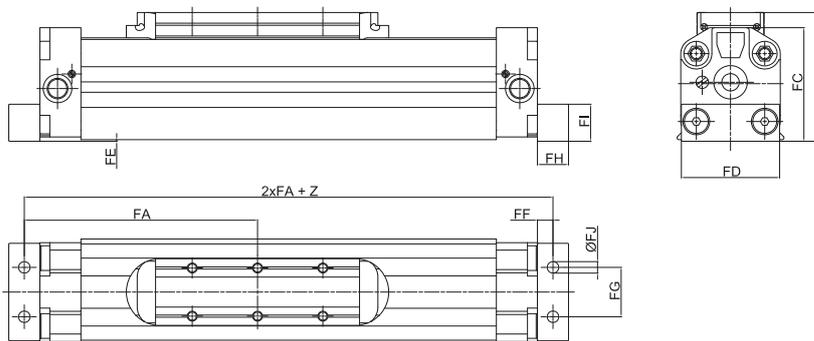

| Piston Ø | Max. stroke | FA    | FB for series |       |       | FC   | FD | FE  | FF   | FG | FH | FI | FJ  | Weight | Order codes |
|----------|-------------|-------|---------------|-------|-------|------|----|-----|------|----|----|----|-----|--------|-------------|
|          |             |       | S1            | S5    | VL1   |      |    |     |      |    |    |    |     |        |             |
| 40       | 400         | 162,5 | 86,5          | 107,3 | 106,7 | 74,9 | 63 | 0,7 | 12,5 | 30 | 25 | 25 | 9   | 0,116  | ASF-13040   |
| 50       | 450         | 187,5 | 104,3         | 125   | 127,5 | 92,4 | 79 | 1,3 | 12,5 | 40 | 25 | 30 | 9,3 | 0,170  | ASF-13050   |

Note: the bracket should not be used if the cylinder stroke is greater than the specified value