9 STRÁNSKÝ A PETRŽÍK






FOOT ACTUATED VALVES SERIES MVFA




Valves without or with protecting cover are available with 3/2 and 4/2 function with or without detent.


This valve series contains rubber gaskets.

Series	MVFA 240
Ports	G1/4"
Flow capacity [Nl/min]	440
Working pressure [MPa]	0.2 to 0.7
Weight without / with protection cover [kg]	function 230: 0.684/1.426; function 231: 0.739/1.481; function 240: 0.774/1.516
Temperature range [°C]	ambient temperature -5 to +60

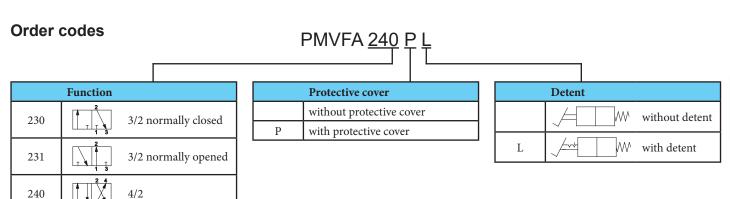

Dimensions





Type with protecting cover

