

# MANUALLY ACTUATED VALVES SERIES MVHC WITH TWIST LEVER



**STRÁNSKÝ A PETRŽÍK**



Valves are available with functions 4/2 and 4/3 with centre closed and exhausted position, with detent positions.

This valve series contains rubber gaskets.

Series	MVHC 200	MVHC 300	MVHC 400
Ports	G1/4"	G3/8"	G1/2"
Flow capacity [Nl/min]	410	1100	3000
Working pressure [MPa]	0 to 0.99	0 to 0.99	0 to 0.99
Weight [kg]	0.280	0.420	1.100
Temperature range [°C]	ambient temperature -5 to +60		

## Order codes - valves

PMVHC 3 0 2 4H



Size	
2	series MVHC 200, thread G1/4"
3	series MVHC 300, thread G3/8"
4	series MVHC 400, thread G1/2"

Function	
0	4/3 with closed centre
1	4/3 with exhausted centre
2	4/2

## - mounting nut

Series	Order codes
200	PMVHC2M
300	PMVHC3M
400	PMVHC4M

## Dimensions

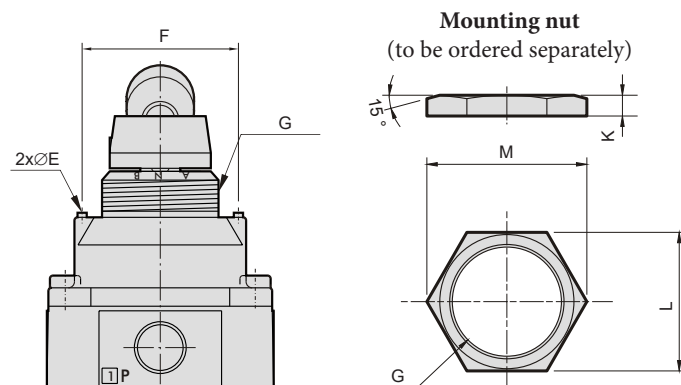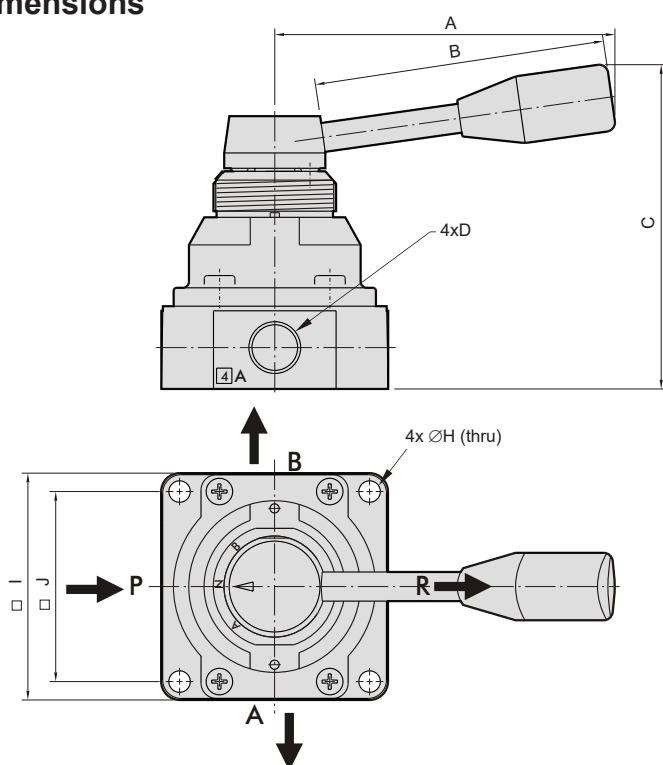

Series	A	B	C	D	E	F	G	H	I	J	K	L	M
200	103		88	G1/4"	3	40	M33x1.5	5.5	62	49	6	41	46
300	111	95	106	G3/8"	3	51	M40x1.5	7	74	62	6	50	57
400	111	95	124	G1/2"	3	64	M50x1.5	6.5	102	88	8	55	63