



Valves are available with or without detent as well as functions 5/2 and 5/3 with closed or exhausted centre.

This valve series contains rubber gaskets.


Series	Z22 5/2	Z22 5/3
Ports	G1/4"	
Flow capacity [Nl/min]	1000	
Working pressure [MPa]	0 to 1.0	
Temperature range [°C]	-10 to +60	
Medium	modified compressed air	
Weight [kg]	0.31	0.38

Order codes

Type	5/2
Without detent	NZ22 VA45 2OG0 0000
With detent	NZ22 VD45 2OG0 0000

Type	5/3
Without detent, exhausted centre	NZ22 VA55 2OG0 0000
With detent, exhausted centre	NZ22 VD55 2OG0 0000
Without detent, closed centre	NZ22 VA65 2OG0 0000
With detent, closed centre	NZ22 VD65 2OG0 0000

Dimensions

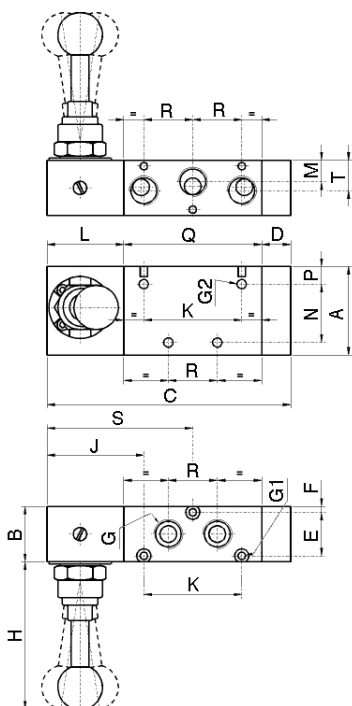

Type	A	B	C	D	E	F	G	G1	G2	H	J	K	L
NZ22 Vx45 ...	40	25	109.5	13	19.6	2.7	G1/4"	3.3	4.2	67	43.5	44	34.5
NZ22 VAx5 ...	40	25	132.5	36	19.6	2.7	G1/4"	3.3	4.2	67	43.5	44	34.5
NZ22 VDx5 ...	40	25	109.5	13	19.6	2.7	G1/4"	3.3	4.2	67	43.5	44	34.5

Type	M	N	P	Q	R	S	T
NZ22 Vx45 ...	9.8	26.3	8	62	22	65.5	13.8
NZ22 VAx5 ...	9.8	26.3	8	62	22	65.5	13.8
NZ22 VDx5 ...	9.8	26.3	8	62	22	65.5	13.8