



**Logical gate AND (production)**

| Order codes         | C-Thread          | A  | B   | D  | E | F  | G  | H  | I | J | K  | Weight [kg] |
|---------------------|-------------------|----|-----|----|---|----|----|----|---|---|----|-------------|
| 2760 0100 0400 0000 | G1/8 <sup>c</sup> | 24 | 4.5 | 20 | 8 | 24 | 40 | 35 | 7 | 5 | 45 | 0.12        |



|                   |                         |
|-------------------|-------------------------|
| Working pressure  | 0.2 to 1.0 MPa          |
| Temperature range | -20°C to +80°C          |
| Working medium    | modified compressed air |



**Logical gate OR (sum)**

| Order codes         | C-Thread          | A  | B   | D  | F  | G  | H  | I | J | K  | Weight [kg] |
|---------------------|-------------------|----|-----|----|----|----|----|---|---|----|-------------|
| 2760 0200 0400 0000 | G1/8 <sup>c</sup> | 24 | 4.5 | 20 | 20 | 40 | 40 | 7 | 5 | 45 | 0.12        |



|                   |                         |
|-------------------|-------------------------|
| Working pressure  | 0.2 to 1.0 MPa          |
| Temperature range | -20°C to +80°C          |
| Working medium    | modified compressed air |



**Manually operated slide valve 3/2 with external threads**

| Order codes         | G - Thread        | A  | B  | C  | D  | Weight [kg] |
|---------------------|-------------------|----|----|----|----|-------------|
| 2740 3200 1006 0600 | G1/4 <sup>c</sup> | 71 | 10 | 24 | 10 | 0.09        |
| 2740 3200 1008 0800 | G3/8 <sup>c</sup> | 87 | 12 | 34 | 10 | 0.20        |
| 2740 3200 1010 1000 | G1/2 <sup>c</sup> | 89 | 14 | 45 | 14 | 0.26        |



Working pressure, temperature and medium see below

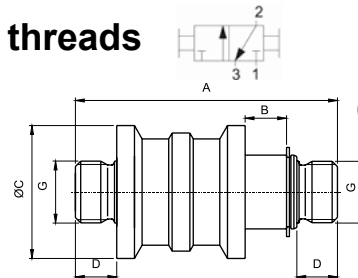

**Manually operated slide valve 3/2 with external thread and tube socket**

| Order codes         | A - Thread        | B  | C  | D  | F | G  | H  | I | J  | OK | Weight [kg] |
|---------------------|-------------------|----|----|----|---|----|----|---|----|----|-------------|
| 2740 3200 2006 3300 | G1/4 <sup>c</sup> | 10 | 77 | 21 | 6 | 27 | 10 | 8 | 24 | 17 | 0.08        |

Working pressure, temperature and medium see below

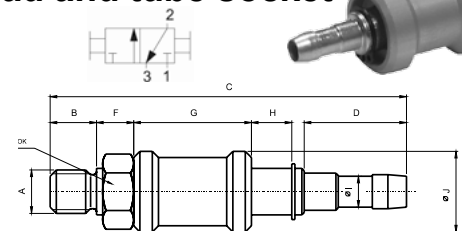

**Manually operated slide valve 3/2 with internal threads**

| Order codes | G - Thread        | J <sub>s</sub> | D <sub>2</sub> | M  | L  | OK | Flow capacity [Nl/min] |
|-------------|-------------------|----------------|----------------|----|----|----|------------------------|
| N530-000    | G1/8 <sup>c</sup> | 4              | 25             | 12 | 48 | 14 | 700                    |
| N530-001    | G1/4 <sup>c</sup> | 7              | 35             | 12 | 58 | 19 | 1100                   |
| N530-002    | G3/8 <sup>c</sup> | 10             | 38             | 12 | 68 | 22 | 1500                   |
| N530-003    | G1/2 <sup>c</sup> | 15             | 48             | 15 | 88 | 27 | 2200                   |

|                   |   |
|-------------------|---|
| Working pressure  | 0 to 1.0 MPa (2740...), 0 to 1.6 MPa (N530) |
| Temperature range | -10°C to +80°C                              |
| Working medium    | modified compressed air                     |

